




Daburn Electronics & Cable
 44 Richboynnton Road
 Dover, NJ 07849

#1803 Flat Ribbon Cable

UL 758/UL1581 · UL 2444 -300 V · CSA 80°C - 300 V

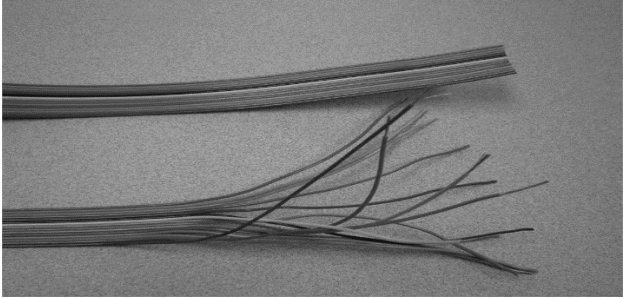

Description: Each conductor is stranded T.C. with extruded PVC insulation, bonded together to form a flat ribbon cable. Conductors separate easily for clean terminations with standard wire connectors, jacks and pins.

Ribbon cable saves space and time on circuit interconnecting assemblies, wiring harnesses, sliding drawers and drop assemblies and simplifies identification. Resists acid, alkalis, flame, moisture, oil, solvents and fungus.

Temperature Rating: -20°C to +80°C. Insulation meets or exceeds UL VW-1/FT1

DABURN Cat. No.	No. of Cond.	Size	Str.	Nom. Wall		Nom. O.D.	
				IN.	MM.	IN.	MM.
1803/6	6	28	7/36	0.012	0.30	.039 x .236	1.00 x 6.00
1803/9	9	28	7/36	0.012	0.30	.039 x .354	1.00 x 9.00
1803/10	10	28	7/36	0.012	0.30	.039 x .394	1.00 x 10.00
1803/14	14	28	7/36	0.012	0.30	.039 x .551	1.00 x 14.00

Standard Packaging: 100 Ft., larger put-ups available.

Color Code: 1-White, 2-White, 3- Black, 4-Green, 5-Green, 6-Red, 7-Yellow, 8-Yellow, 9-Blue .
 Beyond 9 conductors, code is repeated.